




THE NUT MACHINE COMPANY(PTY) Ltd



223 HIGH STREET • OUDTSHOORN

Your One-Stop for Macadamia Nut Processing Equipment, General Engineering, Electrical Installations and Maintenance.

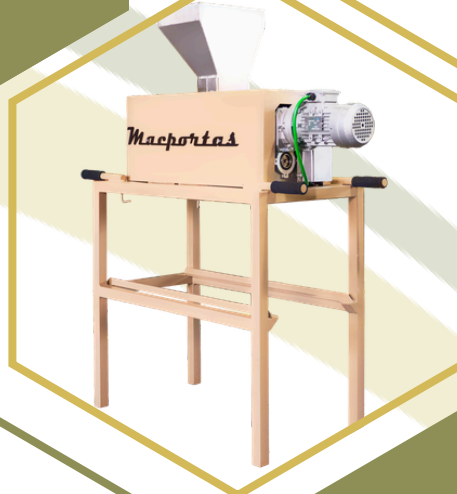

Marius - +27 60 999 9784 • Yolanda - +27 83 628 6125
Oudtshoorn - +27 44 023 0089 • Polokwane - +27 15 297 1617
Contact: sales@nutmachine.co.za • yolanda@nutmachine.co.za

visit our website - www.nutmachine.co.za





THE NUT MACHINE

COMPANY (PTY) LTD

www.nutmachine.co.za



Your One-Stop for Macadamia Nut Processing Equipment, General Engineering, Electrical Installations and Maintenance.

We thank you for the opportunity to introduce our Company and our extraordinary Macadamia Processing equipment to you.

ABOUT US

The Nut Machine Company (Pty)Ltd is situated in South Africa and **specializes** in Macadamia processing equipment worldwide.

We started in 2013 with designing and developing our world renowned MacMartins Macadamia Nut Cracker, registered our company in 2017 and since have been supplying **high-quality** Macadamia Processing Equipment.

Our quality machinery and equipment make drying, processing and packing **more effective** for our customers.

PROFILE

We are a **devoted** company with new ideas, flexible to listen and understand the requirements of our customers.

The Nut Machine Company (Pty)Ltd can assist in equipment and machine requirements as per your macadamia yield needs.

We offer the **complete package**, from intake to vacuum packing.

Furthermore, we offer a full range of **value adding** processing equipment.

Our equipment has been designed and developed to suit the harsh African environment.


All machines have been developed to be as "**MAINTENANCE FREE**" as possible.

The Nut Machine Company (Pty)Ltd is in a position to offer the following services:

- Onsite consultation and installation.
- Design and build Macadamia processing equipment.
- After sales services and assistance per WhatsApp or factory visits.
- We can custom built any processing equipment for small or large-scale purposes.
- SADC certificates can be supplied on all our equipment to SADC countries.
- COC (Certificate of Competence) can be supplied where necessary on most of our machines.

***In short, we are your one-stop for Macadamia processing equipment, onsite installation, maintenance and commissioning.
In addition, we can supply all electrical or mechanical spare parts needed for your equipment.***

Website



SCAN ME

***Currently we
have distributed
to the following
Countries***

- Crackers
- Dehuskers
- Bins and temperature control

- South Africa
- Swaziland
- Mozambique
- Zimbabwe
- Zambia

- Malawi
- Kenya
- Rwanda
- Hong Kong
- Papa New Guinea

DISTRIBUTION

PRODUCT RANGE

- Vacuum machines
- Conveyors
- Drum Roasters

CONTACT US

Please feel free to contact us for great service and our excellent product range.

For quotations email:

Marius Griebenow – sales@nutmachine.co.za

yolanda@nutmachine.co.za

+27 (0) 60 999 9784

+27 (0) 83 628 6125

Oudtshoorn: +27 44 023 0089 / Polokwane: +27 15 297 1617

Website: www.nutmachine.co.za

MACMARTINS CRACKER



VACUUM PACKING



DEHUSKER - 2



MACPORTAS CRACKER



DRUM ROASTER



DEHUSKER - 4



Please be advised that slight variations in colour, size, and appearance may occur over time on our machines.
Terms and Conditions apply and available on our website.



THE NUT MACHINE COMPANY (PTY) LTD



Oudtshoorn - +27 44 023 0089 • Polokwane - +27 15 297 1617

MACMARTINS

INDUSTRIAL MACADAMIA NUT CRACKER

The MacMartins is designed with minimum maintenance requirements and built for long-lasting performance. The body and frame are manufactured from heavy-duty powder-coated mild steel, while all chutes and covers are manufactured from high-quality 304 stainless steel.

Built-In Sizing System

- All rollers are manufactured from solid steel for maximum durability and reliability.
- The adjustable sizer can process nuts ranging from 13 mm to 32 mm and can also be customized according to specific customer requirements.

Moisture Requirements

- The MACMARTINS performs best when cracking nuts at a moisture content below 3%, with an ideal moisture level of approximately 1.5%.

Feeding & Distribution System

- After the intake chute (hopper), a vibration tray ensures even distribution of nuts across the roller cracking system for improved efficiency and consistent cracking performance.

Optional Add-Ons

- MacDust System - The MacDust system can be installed beneath the MACMARTINS Cracker to remove dust and small particles during operation.
- It can also feed directly onto a sorting conveyor or into a colour sorter for a more streamlined processing system.



SPECIFICATIONS

Voltage-	380V 3 phase neutral and earth
Current-	+/- 8 Amp on full load
Power-	4 Kw
Speed-	Variable speed adjusted with VSD
Functions-	Crack macadamia nut in shell
Operation-	3 Phase electrical supply
Capacity-	+/- 1.2-1.5 Ton per hour (depending on variety, moisture content and speed of VSD)
Levelling-	Supplied with feet
Safety-	Safety signs, refer to manual for safety instructions
Weight-	+/- 1500kg
Dimensions:	(uncrated)
Length: 1920mm Width: 1230mm Height: 2000mm	

KEY FEATURES

1. Almost totally maintenance free.
2. No costly replacement blades and wedges.
3. No sprockets and chains that mess grease.
4. Fully adjustable built in sizer, NO pre-sizing.
5. Variable speed drive on the sizer for more accuracy.
6. Sizer infeed rolls are made of solid steel.
7. Extremely robust and built to last.
8. Stainless steel chutes and vibrator pan.
9. Cracking rollers are fully adjustable.
10. The machine is cost effective and easy to maintain.
11. The whole machine is powder coated and ecstastically beautiful.
12. Operator friendly.
13. Good whole and halves nut yield % outcome.
14. Low re-crack rate.
15. The MACMARTINS currently operates in 5 countries around the world.

Please be advised that slight variations in colour, size, and appearance may occur over time on our machines.

Terms and Conditions apply and available on our website.

Marius - +27 60 999 9784 • Yolanda - +27 83 628 6125
Contact: sales@nutmachine.co.za • yolanda@nutmachine.co.za

visit our website - www.nutmachine.co.za





THE NUT MACHINE COMPANY (PTY) LTD



Oudtshoorn - +27 44 023 0089 • Polokwane - +27 15 297 1617

MINI-MACCRACKER

EFFICIENT & RELIABLE NUT CRACKER

The Mini-MacCracker (Baby MacMartin) was developed to complement the MacMartin range, specifically for cracking macadamia nuts smaller than 14 mm, including non-cracks.

Throughput Capacity

- With a processing capacity of approximately 500 kg per hour, the Mini-MacCracker is ideal for small to medium-scale processing plants.

Robust Construction

- The machine is manufactured from heavy-duty, powder-coated mild steel, ensuring durability, reliability, and low maintenance requirements in demanding operating environments.

Stainless Steel Components

- All chutes and feeder pans are constructed from 2 mm stainless steel (304).
- For safety and hygiene, all moving parts and the vibrator feeder are fully enclosed within a stainless-steel enclosure.

Adjustable Sizer System

- The built-in sizer and vibrator pan are fully adjustable via variable speed drives, allowing accurate control over nut sizing and cracking performance.
- Minimum setting: cracks nuts from 12 mm to 16 mm
- Maximum setting: cracks nuts from 13 mm up to 32 mm

Customisation

- The built-in sizer can be customised to suit individual customer requirements and processing needs.

Recommended Operating Range

- For optimal performance, a sizer range of 13 mm to 28 mm is recommended.

Moisture Requirements

- Best cracking results are achieved at a nut moisture content below 3%, with 1.5% being ideal.



SPECIFICATIONS

Voltage-	380V 3 phase neutral and earth
Current-	+/- 8 Amp on full load
Power-	4 Kw
Speed-	Variable speed adjusted with VSD
Functions-	Crack macadamia nut in shell
Operation-	3 Phase electrical supply
Capacity-	+/- 500kg per hour (depending on variety, moisture content and speed of VSD)
Levelling-	Supplied with feet
Safety-	Safety signs, refer to manual for safety instructions
Weight-	+/- 1300kg
Dimensions:	(uncrated)
Length: 1500mm Width: 1000mm Height: 1800mm	

KEY FEATURES

1. Almost totally maintenance free
2. No costly replacement blades and wedges
3. No sprockets and chains that mess grease (HACCP)
4. Fully adjustable built in sizer, NO pre-sizing
5. Variable speed drive on the sizer for more accuracy
6. Sizer infeed rolls are made of solid steel
7. Extremely robust and built to last a life time
8. Stainless steel chutes and vibrator pans
9. Cracking rollers are fully adjustable (can be supplied fully automated)
10. The machine is Cost effective and easy to maintain
11. The whole machine is powder coated and ecstastically beautiful

Please be advised that slight variations in colour, size, and appearance may occur over time on our machines.

Terms and Conditions apply and available on our website.

Marius - +27 60 999 9784 • Yolanda - +27 83 628 6125
Contact: sales@nutmachine.co.za • yolanda@nutmachine.co.za

visit our website - www.nutmachine.co.za





THE NUT MACHINE COMPANY (PTY) LTD



Oudtshoorn - +27 44 023 0089 • Polokwane - +27 15 297 1617

MACPORTAS

PORTABLE MACADAMIA NUT CRACKER

The Nut Machine Company (Pty) Ltd designed and manufactured the MACPORTAS, a compact 220V portable nut cracker.

Robust Construction

- The MACPORTAS is built from mild steel with a durable powder-coated finish, ensuring long-lasting use in farm conditions.

Low Maintenance

- With minimal moving parts, the machine requires only routine cleaning for reliable operation.

Easy Operation

- The fixed built-in sizer eliminates pre-sizing.
- Simply connect to a 220V power supply and feed nuts through the inlet chute.

Versatile Operation

- The standard sizer handles nuts from 16 mm to 28 mm, with custom options available.
- The machine splits into three sections for easy transport.

Efficient Drive


- Dependable 220V electric drive provides smooth, consistent power to the rollers.

Performance

- For best cracking results, process clean, de-husked nuts with a moisture content of less than 3%.
- Lower moisture levels contribute to more uniform cracking and improved efficiency.
- Nuts with any moisture content can be cracked. However, as moisture content increases, some nuts may not crack fully on the first pass and may need to be re-cracked.

SPECIFICATIONS:

Voltage-	220V Single Phase
Current-	+/- 5 Amp
Power-	0.35 Kw
Speed-	Speed can be adjusted by VSD
Functions-	Crack macadamia nuts in shell
Operation-	Electrical
Capacity-	+/- 100kg per hour (depending on variety of nuts, moisture content and the way the inlet chute is fed)
Levelling-	Supplied with articulating feet
Safety-	Safety signs, refer to manual for safety instructions
Weight-	+/- 150kg
Dimensions:	(uncrated)
Length: 1300mm Width: 550mm Height: 1250mm	

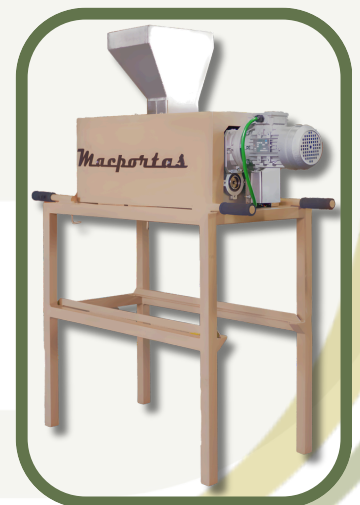

Please be advised that slight variations in colour, size, and appearance may occur over time on our machines.

Terms and Conditions apply and available on our website.

Marius - +27 60 999 9784 • Yolanda - +27 83 628 6125
Contact: sales@nutmachine.co.za • yolanda@nutmachine.co.za

visit our website - www.nutmachine.co.za





THE NUT MACHINE COMPANY (PTY) LTD



Oudtshoorn - +27 44 023 0089 • Polokwane - +27 15 297 1617

TABLE/SAMPLE CRACKER

COMPACT, ADJUSTABLE. BUILT FOR SMALL SCALE CRACKING

The Table/Sample cracker is a compact 220V portable cracker developed to meet the demand for a smaller cracking solution. It is ideally suited for laboratory sample cracking and small-scale processing applications.

Machine Design & Construction

- Compact and portable 220V unit.
- Designed for laboratory and small batch environments
- Operates with an adjustable roller cracking system.
- Collection crate, bag, or bucket can be positioned below the outlet.
- Roller adjustment space 14mm - 34mm.
- Trolley available for purchase on request.

Pre-Sizing System


- Pre-sizing must be done manually before cracking can begin.
- Supplied with two pre-sizing trays.
- Tray sizes available from 14mm to 32mm .
- Standard supplied sizes: 22mm and 24mm.
- Alternative tray sizes must be specified in advance.
- Trays are manufactured from stainless steel and fit securely into the inlet chute.

Operating Requirements

- Ideal cracking moisture content: 5% or less.
- Ensure no foreign objects are present between nuts before cracking.
- Debris or foreign materials may affect performance or cause damage.

Application

- Suitable for laboratory sample cracking.
- Ideal for small-scale processing and quality control testing.



SPECIFICATIONS:

Voltage-	220V 1 phase
Current-	+/- 2.6 Amp
Power-	0.25 Kw
Speed-	40 Rpm
Functions-	Crack macadamia nuts
Operation-	Rollers
Capacity-	+/- 50kg per hour
Levelling-	Supplied with feet
Safety-	Safety signs, refer to manual for safety instructions
Weight-	+/- 60kg
Dimensions:	(uncrated)
Length: 700mm Width: 600mm Height: 750mm	

Please be advised that slight variations in colour, size, and appearance may occur over time on our machines.

Terms and Conditions apply and available on our website.

Marius - +27 60 999 9784 • Yolanda - +27 83 628 6125
Contact: sales@nutmachine.co.za • yolanda@nutmachine.co.za

visit our website - www.nutmachine.co.za





THE NUT MACHINE COMPANY (PTY) LTD



Oudtshoorn - +27 44 023 0089 • Polokwane - +27 15 297 1617

MACHAND CRACKER

STRONG, HIGH QUALITY, HAND CRACKER

There is a strong tendency in the Far East for customers to crack their own nuts, and the MacHand was specifically designed for this purpose.

In addition to its practical function, the MACHAND also serves as a beautiful display piece for a boardroom or showroom and makes a distinguished, high-quality gift for valued customers or suppliers.

Machine Design & Construction

- Manufactured with a solid wooden base.
- Cracker component produced from high-quality 304 food-grade stainless steel.
- Designed for durability, elegance, and long-term use.

Craftsmanship & Exclusivity

- Each MACHAND is individually handmade.
- Every unit carries a unique serial number.
- Supplied with an official Certificate of Origin allocated specifically to each MACHAND.

Application

- Ideal for personal nut cracking.
- Suitable as a premium corporate gift.
- Perfect as a decorative display piece in executive or showroom environments.

MacHand

Length: 450mm Width: 340mm Height: 400mm
(with handle) Wooden board - 30mm high

Mini MacHand

Length: 350mm Width: 200mm Height: 300mm
(with handle) Wooden board - 30mm high



SPECIFICATIONS:

Voltage-	n/a
Current-	n/a
Power-	n/a
Speed-	Hand operated
Functions-	Crack macadamia nuts in shell
Operation-	Per hand
Per batch-	Depending on hand crack speed
Levelling-	Solid wooden base
Safety-	Safety signs, refer to manual for safety instructions
Weight-	+/- 1.85kg
Dimensions:	(uncrated)



Please be advised that slight variations in colour, size, and appearance may occur over time on our machines.

Terms and Conditions apply and available on our website.

Marius - +27 60 999 9784 • Yolanda - +27 83 628 6125
Contact: sales@nutmachine.co.za • yolanda@nutmachine.co.za

visit our website - www.nutmachine.co.za





THE NUT MACHINE COMPANY (PTY) LTD



Oudtshoorn - +27 44 023 0089 • Polokwane - +27 15 297 1617

DEHUSKER-4

RELIABLE. BUILT FOR SMALL-SCALE FARMING

The Nut Machine Company (PTY) LTD has developed a new, affordable 4-lane DEHUSKER designed for the medium-scale farmer, offering efficient and reliable nut dehusking with minimal maintenance.

Machine Design & Construction

- Eliminates traditional wear parts such as springs, bushes, rods, and rockers.
- Replaced with durable ROSTA tensioners for long-lasting performance.
- Rolls driven by a 1.5 kW geared motor.
- All rolls are case-hardened for extended durability.

Operating Features


- Tensioners can be quickly and easily adjusted depending on the variety of nut being dehusked.
- Using the guide plates and tensioners numbers to easily adjust.
- Chains can be moved closer to the rolls when processing smaller nuts by simply adjusting the tensioners.
- User-friendly adjustment allows for efficient operation and minimal downtime.

Application

- Ideal for medium-scale farmers.
- Efficiently dehusks a wide variety of nut sizes.
- Low-maintenance design reduces operational costs and extends machine life.

Note: The size of the nuts doesn't matter.

Adjust the tensioners according to how hard the nuts are.

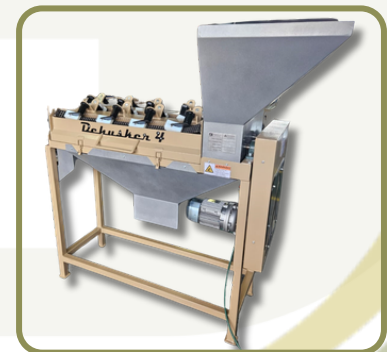

SPECIFICATIONS:

Voltage-	380V 3 Phase neutral and earth
Current-	+/- 3.7A
Power-	1.5 Kw
Motor RPM-	1440 Rpm
Functions-	Dehusking
Operation-	Electrical
Per Batch-	+/- 2 Ton per hour
Levelling-	Supplied with feet
Safety-	Safety signs, refer to manual for safety instructions
Weight-	+/- 300kg
Dimensions:	(uncrated)
Length: 1900mm Width: 600mm Height: 1750mm	

Please be advised that slight variations in colour, size, and appearance may occur over time on our machines.

Terms and Conditions apply and available on our website.

Marius - +27 60 999 9784 • Yolanda - +27 83 628 6125
Contact: sales@nutmachine.co.za • yolanda@nutmachine.co.za

visit our website - www.nutmachine.co.za





THE NUT MACHINE COMPANY (PTY) LTD



Oudtshoorn - +27 44 023 0089 • Polokwane - +27 15 297 1617

DEHUSKER-2

RELIABLE. ADJUSTABLE. BUILT FOR SMALL-SCALE FARMING

The Nut Machine Company (Pty)Ltd has developed an affordable 2-lane DEHUSKER for the small-scale farmers and growers. The Dehusker – 2 is highly efficient, aesthetically appealing, and competitively priced.

Robust Construction

- Manufactured from mild-steel and powder coated.

Low Maintenance Design

- By removing all wear parts such as springs, bushes, rods, and rockers, replacing them with ROSTA tensioners.

Easy Operation

- Using the guide plates and tensioners numbers to easily adjust.
- Sorting during the dehusking process is done using two chutes: an outlet chute and a husk chute.

Versatile Operation

- Depending on the variety of nuts being de-husked, these tensioners can be quickly and easily adjusted simply by loosening a bolt and adjusting the tensioner with the guide plate number 1 – 6 and tensioners marked A-H.
- Furthermore, when smaller nuts are husked, the chains can be adjusted closer to the rolls by simply adjusting the tensioners.

Efficient Drive System

- The feed rolls are driven by an geared motor.

Performance

- Capacity of approximately 1 ton per hour, subject to the quality, dryness of husk's, variety of macadamia nuts and feeding option used.
- The Dehusker is also available in single phase upon clients requirements.

SPECIFICATIONS:

Voltage-	380V 3-phase + earth
Current-	+/- 5.1 Amp
Power-	1.5 Kw
Motor RPM-	1440 Rpm motor and gearbox
Functions-	Dehusking husk from nut
Operation-	3 Phase electrical supply
Capacity-	+/- 1Ton per hour (depending on variety, moisture content, hardness of husk and feeding option used)
Levelling-	Supplied with fixed feet
Safety-	Safety signs, refer to manual for safety instructions
Weight-	+/- 250kg
Dimensions:	(uncrated)
Length: 1900mm Width: 600mm Height: 1750mm	



Please be advised that slight variations in colour, size, and appearance may occur over time on our machines.
Terms and Conditions apply and available on our website.

Marius - +27 60 999 9784 • Yolanda - +27 83 628 6125
Contact: sales@nutmachine.co.za • yolanda@nutmachine.co.za

visit our website - www.nutmachine.co.za





THE NUT MACHINE COMPANY (PTY) LTD



Oudtshoorn - +27 44 023 0089 • Polokwane - +27 15 297 1617

MACTUMBLER

SMALL PARTICLES & SMALL NUTS REMOVER

The MacTumbler is available in various sizes, depending on the capacity requirements of your dehusking plant. It is specifically designed to work in combination with the DeHusker-2 in our range.

The main purpose of the MacTumbler is to remove husk, dirty particles, and undersized nuts below 13 mm NIS.

Confirm before purchase if the MacTumbler will be used before or after Dehusking.

Construction & Design

- The MacTumbler is manufactured from durable mild steel and finished with a protective painted coating for long-lasting performance.
- The standard MacTumbler drum size is 600 mm x 2 meter.

Electrical & Speed Control

- The MacTumbler comes standard with a DOL starter, while a VSD (Variable Speed Drive) is available as an optional extra.
- The size and operating speed of the tumbler depend on the capacity of your plant and can be customized accordingly.
- A variable speed drive can also be supplied for improved control and efficiency.

Feeding & Discharge System

- Each tumbler is fitted with an outlet chute designed to feed directly into the debris conveyor system.

An optional outlet conveyor can also be supplied to transport debris and undersized nuts to a bin or trailer located outside the building.

SPECIFICATIONS ON THE 2M DRUM:

Voltage-	380V 3 Phase neutral and earth
Current-	4.8 Amp on full load
Speed-	72 Rpm (VSD optional)
Functions-	Removing husk, leaves, sticks & undersized nuts
Operation-	Tumbling the product
Levelling-	Supplied with feet
Safety-	Safety signs, refer to manual for safety instructions
Weight-	+/- 380kg
Dimensions:	(uncrated)
Length: 2000mm Width: 750mm Height: 1640mm	



Please be advised that slight variations in colour, size, and appearance may occur over time on our machines.

Terms and Conditions apply and available on our website.

Marius - +27 60 999 9784 • Yolanda - +27 83 628 6125
Contact: sales@nutmachine.co.za • yolanda@nutmachine.co.za

visit our website - www.nutmachine.co.za





THE NUT MACHINE COMPANY (PTY) LTD



Oudtshoorn - +27 44 023 0089 • Polokwane - +27 15 297 1617

DRUM ROASTER

AFFORDABLE, VALUE-ADDING ROASTING SOLUTION

The Nut Machine Company (PTY) Ltd has designed a Drum Roaster that is solidly built and aesthetically appealing, making it ideal for small to medium-scale nut processing operations.

Construction

- The roaster features a robust, durable frame with a roasting drum manufactured from 304 stainless-steel wire mesh, ensuring strength, hygiene, and long service life.

Setup & Operation

- The roaster operates as a batch roaster, processing approximately 15-50 kg per batch, depending on nut size.
- Average roasting time may vary due to customers own requirements.

Control & Automation

- The roaster is equipped with a time switch to control roasting duration.
- You have full control, with an switch that stops the drum in the correct position for easy filling and emptying, improving safety and ease of operation.

Roasting System

- Heating is provided by thermo-fan elements that circulate hot air evenly through the rotating drum.
- This ensures uniform heat distribution and consistent roasting results across each batch.

Performance

- The roaster is capable of roasting a variety of nuts, including macadamias, peanuts, almonds, and cashews.
- Roasting capacity and time vary depending on the nut type, size, oil content and customer specifications.
- Resulting consistent, high-quality roasting results.

SPECIFICATIONS:

Voltage-	380V 3-phase + earth
Current-	+/- 11 Amp
Power-	3.5 Kw
Motor RPM-	28 Rpm
Functions-	Roasting of all types of nuts
Operation-	electrical
Capacity-	+/- 15-50 kg per batch (macadamia)
Levelling-	Supplied with articulating feet
Safety-	Safety signs, refer to manual for safety instructions
Weight-	+/- 165kg
Dimensions:	(uncrated)
Length: 1650mm Width: 900mm Height: 1600mm	



Please be advised that slight variations in colour, size, and appearance may occur over time on our machines.

Terms and Conditions apply and available on our website.

Marius - +27 60 999 9784 • Yolanda - +27 83 628 6125
Contact: sales@nutmachine.co.za • yolanda@nutmachine.co.za

visit our website - www.nutmachine.co.za





THE NUT MACHINE COMPANY (PTY) LTD



Oudtshoorn - +27 44 023 0089 • Polokwane - +27 15 297 1617

DRYING BINS

MODULAR DESIGN, EFFICIENT & EASY TO ASSEMBLE

The Nut Machine Company (PTY) Ltd has developed a modular bulk drying bin system designed for efficiency, flexibility, and ease of use.

Pre-Manufactured & Easy to Assemble

Each bin is pre-manufactured and delivered to the customer in compact bulk packs. On site, the system can be quickly and easily assembled, reducing installation time and effort.

Ensure the bin is always installed on a level, solid concrete surface and positioned under a roof to prevent any particles or debris from entering the bin.

Modular & Expandable Design

- Thanks to its modular design, the system can be expanded at any time.
- Additional panels can be assembled to the left or right side of an existing bin, allowing for future capacity growth without replacing the entire system.

Built to Your Requirements

- We offer three standard drying bin sizes designed to meet your specific needs: 2-ton, 5-ton and 10-ton.
- Bin dividers are also available upon request at an additional cost. These dividers split the bin into separate sections that can be used as smaller bins.

Efficient Airflow & Discharge

- The fan is installed in a robust door and mounted on one side of the bin panel.
- The opposite side features the nut outlet gate (NIS) for controlled and efficient discharge.

Flexible Heating Options

Where electricity is limited or unavailable, the bins can be heated using alternative heat sources, such as:

- Boilers ▪ Hot water kettles ▪ Heat exchangers

Optional Add-Ons

Additional conveyors, walkways and bin dividers are available and can be quoted separately to suit your site layout and operational needs.

ENTRY LEVEL KIT



10 TON



Pre-packed, ready
for delivery

MACHINE SPECIFICATIONS:

Functions- Drying of NIS.
Operation- Axial flow fan.
Heater bank- 3kw 220/380V heaters. (full kit only)
Weight- Depends on size of bin.
Dimensions: (pre-packed)

	2 Ton:	5 Ton:	10 Ton:
Length -	2400mm	2400mm	2400mm
Width -	1200mm	2400mm	2400mm
Height -	2000mm	2000mm	3200mm

FULL KIT



2 TON

Please be advised that slight variations in colour, size, and appearance may occur over time on our machines.
Terms and Conditions apply and available on our website.

Marius - +27 60 999 9784 • Yolanda - +27 83 628 6125
Contact: sales@nutmachine.co.za • yolanda@nutmachine.co.za

visit our website - www.nutmachine.co.za





THE NUT MACHINE COMPANY (PTY) LTD



Oudtshoorn - +27 44 023 0089 • Polokwane - +27 15 297 1617

VACUUM MACHINE

Most suitable machine for Bulk Vacuum Packing

The vacuum machine is used to vacuum pack products like macadamias, almonds, walnuts, cashew, rice, peanuts, seeds, dry fruits, tea and various spices etc.

- Flexible bags 25lbs (11.43kg) 690mm x 475mm & 50lbs (22.86kg) 790mm x 585mm
- Variety of products can be sealed.
- Retains its aroma & freshness.
- Protects from pest attacks.
- The vacuum packing machine is very efficient.
- The vacuum machines can be supplied free standing (complete with a input - and output conveyer) or as a complete vacuum plant.

INCLUDED

1. Vacuum Machine
2. Inlet conveyer
3. Outlet conveyer
4. Vacuum pump
5. Regulator (if required)



**VACUUM MACHINE WITH INLET
AND OUTLET CONVEYORS**



**SOLE AGENTS
OF SEPACK
EQUIPMENT & PARTS
IN SOUTH AFRICA**

MACHINE SPECIFICATIONS:

Model Name / No: SEPACK 650W - 65
650mm x 5mm electric impulse, pneumatic actuated
Sealing:
Max bag size: bag size less than 650mm in width and 850mm in length.
Vacuum Pump: 2 liter/min @ 6 bar pressure
Power: 380V neutral + earth
Consumption: 3.5kw
Size: 350kg with conveyour, vacuum pump 60kg

Length - 1885mm Breadth - 1015 mm Height - 1035mm
Nitrogen gas flush system, vacuum bags and compressor not included.

NEEDED FOR INSTALLATION:

- Levelled surface for Vacuum machine.
- Clean work area.
- Clean 3 phase power point.
- Nitrogen gas cylinder or CO².
- Compressor/compressed air between 3-6 bars.

Please be advised that slight variations in colour, size, and appearance may occur over time on our machines.

Terms and Conditions apply and available on our website.

Marius - +27 60 999 9784 • Yolanda - +27 83 628 6125
Contact: sales@nutmachine.co.za • yolanda@nutmachine.co.za

visit our website - www.nutmachine.co.za



THE NUT MACHINE COMPANY (PTY) LTD



Oudtshoorn - +27 44 023 0089 • Polokwane - +27 15 297 1617

MACHARVESTER

HEAVY DUTY, ROBUST & COST EFFECTIVE

The Macharvester is a heavy-duty, robust, and cost-effective hand-operated macadamia harvester specifically designed for collecting nuts lying on the ground around the tree.

Built for durability and ease of use, the MACHARVESTER provides an efficient harvesting solution with minimal maintenance requirements.

Construction & Design

- The MACHARVESTER is manufactured from high-quality galvanised steel for strength, durability, and corrosion resistance.
- The collection wheels are manufactured from high-density polyamide to ensure reliable and long-lasting performance in various harvesting conditions.

Collection System

- Each harvester is fitted with a front-mounted crate holder where the collected nuts are deposited during operation.
- The polyamide brushes/roller collect the nuts as the harvester is pushed forward, while a series of fingers dislodge the nuts into the crate for easy collection.
- The brush/roller assembly is mounted on a shaft fitted with bushes for smooth and dependable operation.

Maintenance

- The MACHARVESTER is designed for easy maintenance, making it a practical and reliable solution for daily harvesting operations.



PICKING CRATE NOT INCLUDED

Please be advised that slight variations in colour, size, and appearance may occur over time on our machines.
Terms and Conditions apply and available on our website.

Marius - +27 60 999 9784 • Yolanda - +27 83 628 6125
Contact: sales@nutmachine.co.za • yolanda@nutmachine.co.za

visit our website - www.nutmachine.co.za





THE NUT MACHINE COMPANY (PTY) LTD

Your One-Stop for Macadamia Nut Processing Equipment, General Engineering, Electrical Installations and Maintenance.

HEAD OFFICE:
223 High Street
Oudtshoorn
South Africa
Reg No: 2017/439053/07

WORKSHOP:
Polokwane


yolanda@nutmachine.co.za
VAT No: 4530281783
www.nutmachine.co.za

CONTACT: +27 (0) 44 023 0089
+27 (0) 15 297 1617
+27 (0) 83 628 6125



Customs No: 219678

MARCH 2026 PRICE LIST

Terms and conditions apply. Please be advised that slight variations in colour, size, and appearance may occur over time on our machines.

MACMARTINS MACADAMIA INDUSTRIAL CRACKER Capacity: ±1.2 to 1.5 tons per hour, includes sizer Voltage: 380V 3 Phase neutral and earth		R 525,000.00
MINI MACCRACKERS MACADAMIA CRACKER Capacity: ±500kg per hour, includes sizer Voltage: 380V 3 Phase neutral and earth		R 325,000.00
MACPORTAS MACADAMIA CRACKER Capacity: ±100kg per hour includes sizer Voltage: 220 V Single Phase		R 85,000.00
TABLE / SAMPLE MACADAMIA CRACKER Capacity: ±50kg per hour- Pre sizing needs to be done beforehand. Two trays included, 22mm & 24mm Voltage: 220 V Single Phase Extra trays R495.00 Size - 14mm, 16mm, 18mm, 20mm, 26mm, 28mm, 30mm, 32mm		R 28,500.00
TROLLEY FOR TABLE / SAMPLE CRACKER Trolley available on request Length 1m Width 600mm Height 690mm, mild steel, powder coated with stainless steel top		R 4 000.00

All prices exclude VAT, Crating, Installation and/or Delivery

MINI MACHAND Solid wood base hand cracker - perfect gift Stainless steel slot Length - 350mm Width - 200mm Height - 300mm		R 1 750.00
MACHAND Solid wood base hand cracker - perfect gift Stainless steel slot Length - 450mm Width - 340mm Height - 400mm		R 2 850.00
DEHUSKER-4 LANE MACADAMIA DE-HUSKER Capacity: ±2 tons per hour Manufacture with Rosta Tensioners and guiding plates. Single phase available on request Voltage: 380V 3 Phase neutral and earth		R 175,000.00
DEHUSKER-2 LANE MACADAMIA DE-HUSKER Capacity: ±1 tons per hour Manufacture with Rosta Tensioners and guiding plates. Single phase available on request Voltage: 380V 3 Phase neutral and earth		R 85,000.00
DRUM ROASTER Capacity: ±15 - 20kg per batch Voltage: 380V 3 Phase neutral and earth		R 92,500.00
MACTUMBLER Removes leaf, stick, stone and bad nuts and under size nuts smaller than 13mm Voltage: 380V 3 Phase neutral and earth Drum size: 2m (1m available on request)		R 68,000.00

VACUUM PACKING MACHINE

Comes with input & output conveyors and 350cbm pump

Capacity: 25lbs-(11.43kg) or 50lbs-(22.68kg)

Voltage: 380V 3 Phase neutral and earth



R 295,000.00

DRYBIN

Modular galvanized with easy let down
Entry level consist off, easy let down, fan and DOL
starter.

Length 2.4m Width 1.2m Height 2m

2 Ton



R 60,000.00

DRYBIN

Modular galvanized with easy let down
Entry level consist off, easy let down, fan and DOL
starter.

Length 2.4m Width 2.4m Height 2m

5 Ton



R 70,000.00

DRYBIN

Modular galvanized with easy let down
Entry level consist off, easy let down, fan and DOL
starter.

Length 2.4m Width 2.4m Height 3.2m

10 Ton



R 90,000.00

ADD ON FOR FULL KIT - DRYING BIN CONTROL SET

- Control Panel (PLC)
- Heater Banks
- Humidity and Temperature Controls
- Elements



R 18,000.00

All prices exclude VAT, Crating, Installation and/or Delivery

Terms and Conditions apply (available on our website)

Refer to the following website for full specifications on the above: www.nutmachine.co.za

Other products and plants available on request.

Capacity of machines may vary due to variety, quality, moisture content, feeding option used to inlet nuts, VSD speed, debris processed with nuts and style of nuts cracked/processed.

Pre-Check and clean all machinery and conveyors before use and at regular intervals and ensure regular maintenance.

No machines are guaranteed if foreign particles are processed with the nuts i.e., stones, sticks, bolts, nuts etc.

(It remains the customers responsibility to make sure the nuts are clean)

SALES

Marius Griebenow 060 999 9784 sales@nutmachine.co.za

Yolanda Cloete 082 465 5611 yolanda@nutmachine.co.za

TRADING HOURS

Monday - Friday

08h30 - 16h00

Why Do Business With The Nut Machine Company?

- ✓ Quality machinery built for reliability and performance
- ✓ Friendly, knowledgeable customer support
- ✓ Fast turnaround times and dependable service
- ✓ Innovative solutions tailored to your needs
- ✓ Proudly serving the nut processing industry with excellence
- ✓ Commitment to customer satisfaction and long-term relationships
- ✓ Durable equipment designed for efficiency and productivity
- ✓ Trusted by businesses across South Africa and beyond

At The Nut Machine Company, we don't just supply machinery – we provide solutions you can rely on.



Please be advised that slight variations in colour, size, and appearance may occur over time on our machines.
Terms and Conditions apply and available on our website.

Marius - +27 60 999 9784 • Yolanda - +27 83 628 6125
Oudtshoorn - +27 44 023 0089 • Polokwane - +27 15 297 1617
Contact: sales@nutmachine.co.za • yolanda@nutmachine.co.za

visit our website - www.nutmachine.co.za



Feel free to contact us for a free quotation

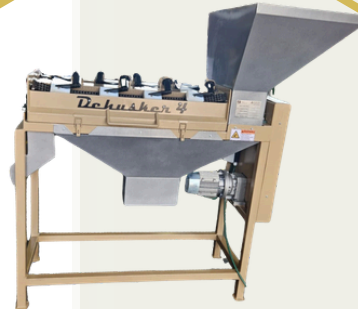

Marius - +27 60 999 9784 • Yolanda - +27 83 628 6125
Oudtshoorn - +27 44 023 0089 • Polokwane - +27 15 297 1617
Contact: sales@nutmachine.co.za • yolanda@nutmachine.co.za

visit our website - www.nutmachine.co.za

